DBEE/U 102 Multipole Receptacles

All dimensions see note **1)**

Contact polarity A



Contact polarity Z





Solder (-x30/-x40)



PCB (-x39/-x49)

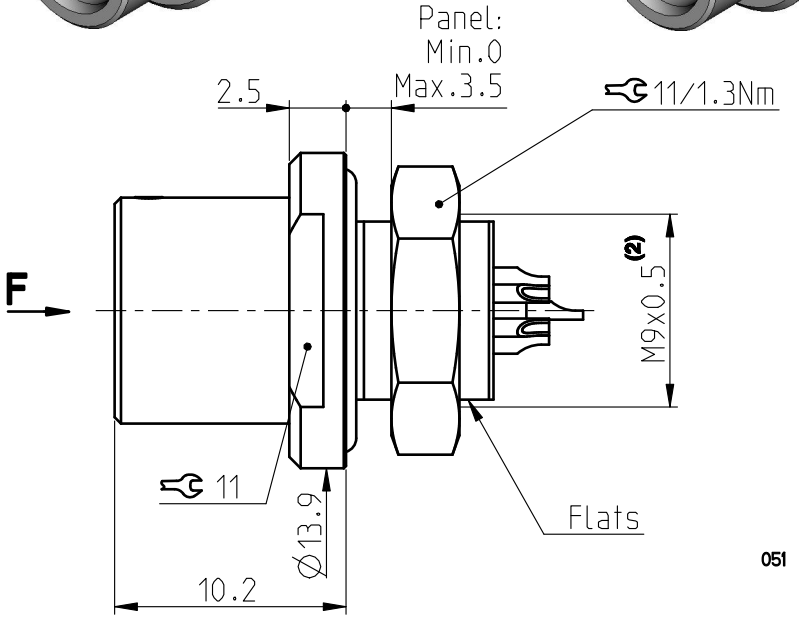



CONTACT CONFIGURATION			Contacts	Solder cup Ø	C	PIN Ø
102	A Z	051	2	0.79	-	-
102	A Z	052	3	0.79	7.6 -	0.63 -
102	A Z	053	4	0.79	7.8 -	0.40 -
102	A Z	054	5	0.79	7.8 7.6	0.40 0.50
102	A Z	056	7	0.43	7.1 7.4	0.63
102	A Z	059	9	0.43	- 7.4	- 0.4

Keying codes (View from F)

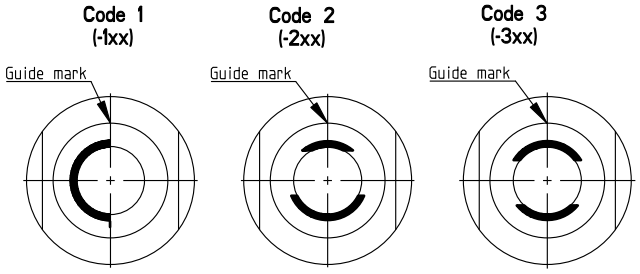

Pin layout / PCB hole pattern for polarity A - View from F (3)

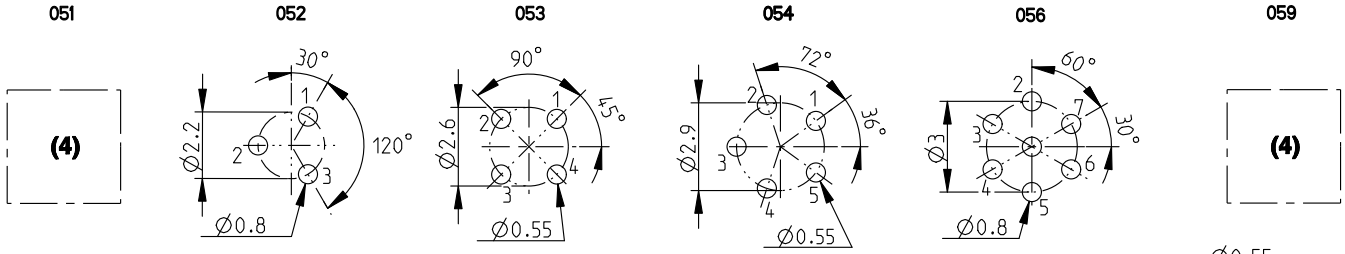

Polarity Z - View from F

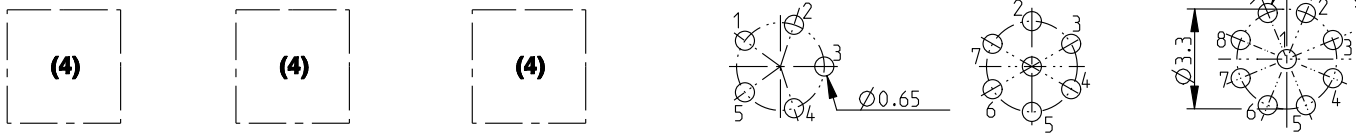

All dimensions in mm	Rev.	Pages
600551	2a	1/1

Notes :
1) All tolerances resulting from connector assembly are typically ± 0.3mm
2) If receptacle is screwed directly into threaded hole, oversize thread by +0.05mm
3) Recommended PCB hole dimensions may be adjusted to application
4) Please contact us
Part number example : DBEE 102 A056-130

Fischer CONNECTORS
www.fischerconnectors.com

Information provided herein is believed to be accurate at time of publishing.Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.