



FISCHER MINIMAX™ SERIES

4 TO 24
CONTACTS

HIGH DENSITY SIGNAL & POWER MINIATURIZATION

- Up to 45% smaller
- Lightweight
- IP68 mated and unmated
- Rugged with high corrosion resistance



HDMI™



THE RELIABLE EXPERT

fischer®
CONNECTORS

1:1 SIZE COMPARAISON

BODY STYLES




SIZE 06

2+2 and 12 contacts



SIZE 08

19 and 24 contacts

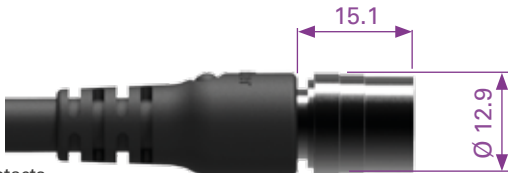

Up to 45% smaller

Size 08 compared to standard receptacles with a similar contact density



All dimensions shown are in millimeters and are for reference only.

PLUGS

CABLE MOUNTED



BODY STYLES	MP11-L	MP11-S	MP11-Q
Locking system	Push-pull	Screw-locking	Quick-release
Sealing up to	IP68	IP68	IP68
Design	Short/Overmolding	Short/Overmolding	Short/Overmolding

RECEPTACLES

CABLE MOUNTED



BODY STYLES	MR50-L	MR50-S	MR50-Q
Locking system	Push-pull	Screw-locking	Quick-release
Sealing up to	IP68	IP68	IP68
Design	Short/Overmolding	Short/Overmolding	Short/Overmolding

PANEL REAR MOUNTED



BODY STYLES	MR11-L	MR11-S	MR11-Q
Locking system	Push-pull	Screw-locking	Quick-release
Sealing up to	IP68	IP68	IP68
Design	Front-projecting	Front-projecting	Front-projecting
Termination	Solder/PCB	Solder/PCB	Solder/PCB

SOFT CAPS

- Sealing caps protect unmated connectors in the field
- Perfectly suit applications where a lightweight, noiseless option is preferred



PC-BOARD TERMINATION

- Rigid flex solution available for SMD connectors
- Compatible with signal & power
- Custom design available upon request



CABLE ASSEMBLY SOLUTIONS

- Rugged & submersible solutions
- Bend relief for easy self-assembly
- Cable assembly with straight or angled overmolding



For more information visit www.fischerconnectors.com/minimax